

STAMFORD®

S9H1D-A4 Wdg.61 - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the IEC 60034 and the relevant sections of other international standards such as BS5000-3, ISO 8528-3, VDE 0530, NEMA MG1-32, CSA C22.2-100 and AS 60034. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System					
AVR Type	DM110	DECS100	DECS150		
Voltage Regulation	± 0.25%	± 0.25%	± 0.25%		with 4% Engine Governing
AVR Power	PMG	PMG	PMG		

No Load Excitation Voltage (V)	9.1
No Load Excitation Current (A)	0.82
Full Load Excitation Voltage (V)	41
Full Load Excitation Current (A)	3.72
Exciter Time Constant (seconds)	0.34

STAMFORD®

S9H1D-A4 Wdg.61

Electrical Data				
Insulation System	H			
Stator Winding	Double Layer Lap			
Winding Pitch	5/6			
Winding Leads	6			
Winding Number	61			
Number of Poles	4			
IP Rating	IP23			
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others			
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%			
Short Circuit Ratio	1/Xd			
Steady State X/R Ratio	18.51			
50 Hz				
Telephone Interference	THF<2%			
Cooling Air Flow	2.78 m³/sec			
Voltage Series Star (V)	6300	6600	6900	-
Voltage Parallel Star (V)	-	-	-	-
Voltage Delta (V)	-	-	-	-
kVA Base Rating (Class H) for Reactance Values (kVA)	1909	2000	2000	-
Saturated Values in Per Unit at Base Ratings and Voltages				
Xd Dir. Axis Synchronous	3.161	3.017	2.760	-
X'd Dir. Axis Transient	0.381	0.364	0.333	-
X''d Dir. Axis Subtransient	0.249	0.238	0.217	-
Xq Quad. Axis Reactance	1.492	1.424	1.303	-
X''q Quad. Axis Subtransient	0.403	0.385	0.352	-
XL Stator Leakage Reactance	0.232	0.221	0.202	-
X2 Negative Sequence Reactance	0.374	0.357	0.327	-
X0 Zero Sequence Reactance	0.180	0.172	0.157	-
Unsaturated Values in Per Unit at Base Ratings and Voltages				
Xd Dir. Axis Synchronous	3.793	3.620	3.312	-
X'd Dir. Axis Transient	0.439	0.419	0.383	-
X''d Dir. Axis Subtransient	0.291	0.278	0.254	-
Xq Quad. Axis Reactance	1.536	1.467	1.342	-
X''q Quad. Axis Subtransient	0.484	0.462	0.423	-
XL Stator Leakage Reactance	0.262	0.250	0.228	-
Xlr Rotor Leakage Reactance	0.318	0.304	0.278	-
X2 Negative Sequence Reactance	0.449	0.428	0.392	-
X0 Zero Sequence Reactance	0.211	0.201	0.184	-

STAMFORD®

S9H1D-A4 Wdg.61




Time Constants (Seconds)		
T'd Transient Time Const.	0.268	
T''d Sub-Transient Time Const.	0.021	
T'do O.C. Field Time Const.	2.340	
Ta Armature Time Const.	0.072	
T''q Sub-Transient Time Const.	0.0260	
Resistances in Ohms (Ω) at 22^oC		
Stator Winding Resistance (Ra), per phase for series connected	0.2720	
Rotor Winding Resistance (Rf)	0.48	
Exciter Stator Winding Resistance	9.8	
Exciter Rotor Winding Resistance per phase	0.014	
PMG Phase Resistance (Rpmg) per phase	3.8	
Positive Sequence Resistance (R1)	0.3400	
Negative Sequence Resistance (R2)	0.3917	
Zero Sequence Resistance (R0)	0.3400	
Saturation Factors		6600V
SG1.0	0.162	
SG1.2	0.698	
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than ISO 21940-11 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	0, 00	0, 00, None
Moment of Inertia	65.8 kgm ²	63.7 kgm ²
Weight Wound Stator	1500kg	1500kg
Weight Wound Rotor	1686kg	1614kg
Weight Complete Alternator	4800kg	4800kg
Shipping weight in a Crate	5150kg	5150kg
Packing Crate Size	160 x 200 x 220(cm)	160 x 200 x 220(cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	6232
Bearing Non-Drive End	6324	6324

STAMFORD®

S9H1D-A4 Wdg.61

THREE PHASE EFFICIENCY CURVES


50Hz

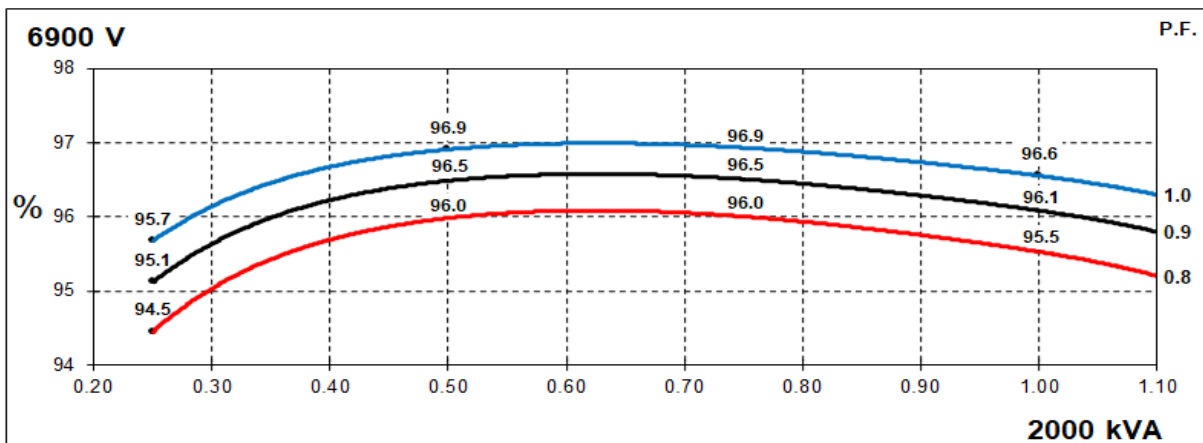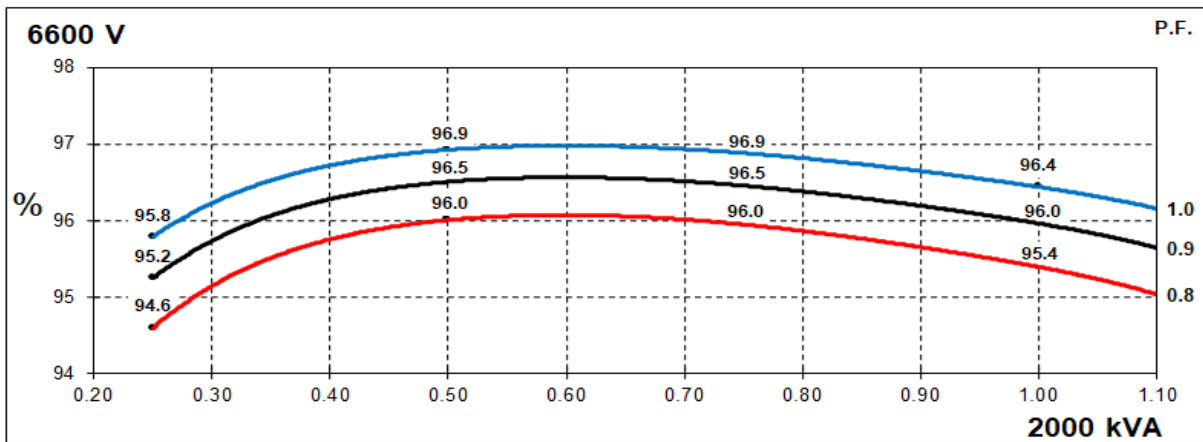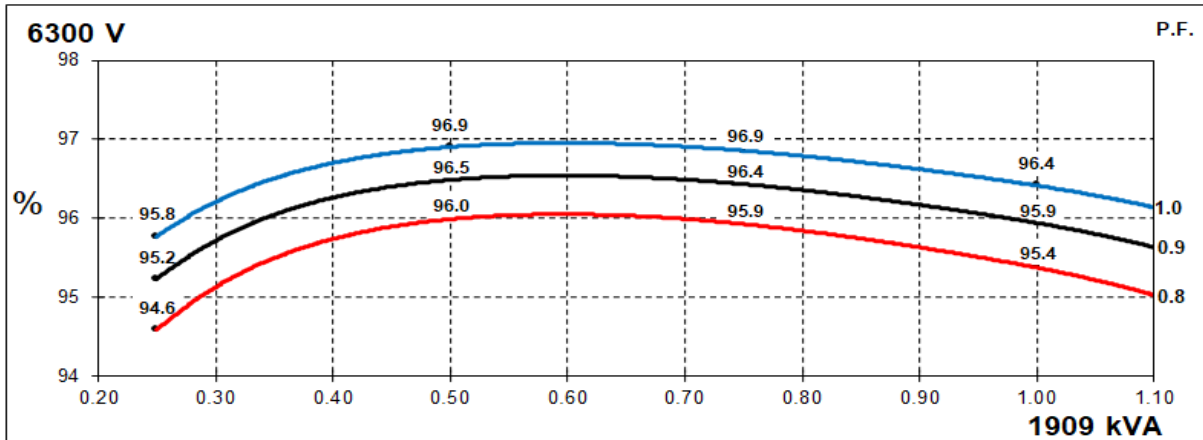

STAMFORD®

S9H1D-A4 Wdg.61

Locked Rotor Motor Starting Curves - Separately Excited

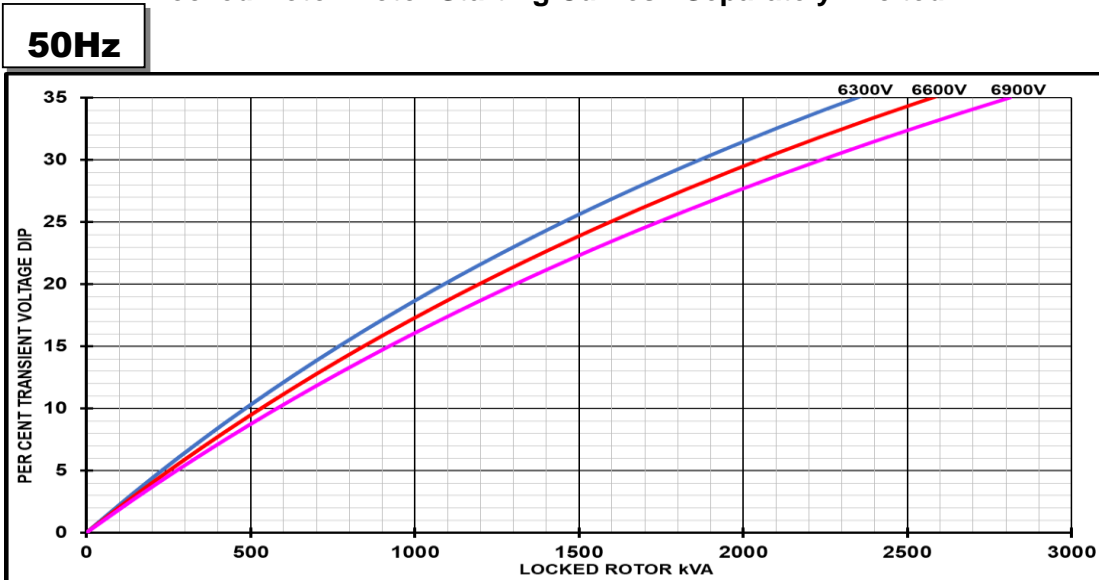

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
Lagging PF	Scaling Factor	Lagging PF	Scaling Factor
<= 0.4	1.00	<= 0.4	1.25
0.5	0.95	0.5	1.20
0.6	0.90	0.6	1.15
0.7	0.86	0.7	1.10
0.8	0.83	> 0.7	1.00
0.9	0.75		
0.95	0.70		
1	0.65		


Note: To determine % Transient Voltage Dip or Voltage Rise at various PF, multiply the % Voltage Dip from the curve directly by the Scaling Factor.

STAMFORD[®]

S9H1D-A4 Wdg.61

Three-phase Short Circuit Decrement Curve - Separately Excited

50Hz

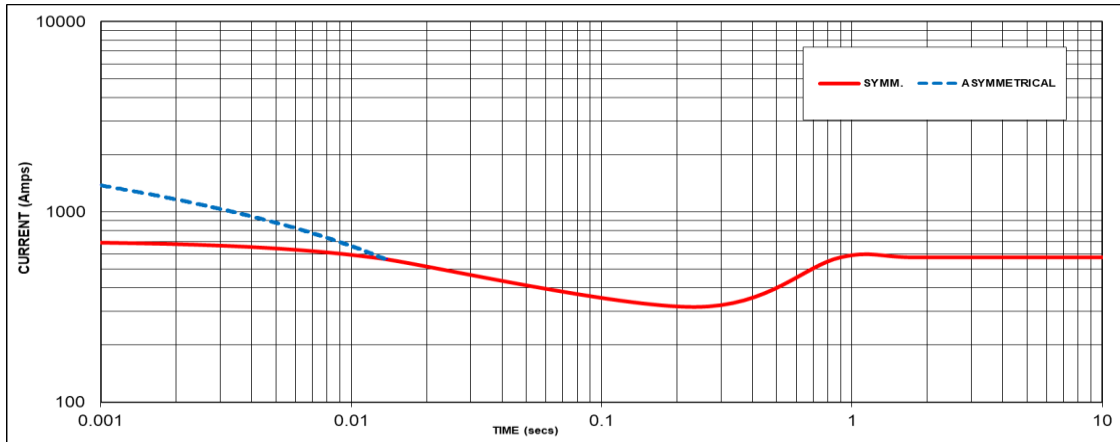

Sustained Short Circuit = 578 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
6300V	X 1.00	-	-
6600V	X 1.05	-	-
6900V	X 1.09	-	-
-	-	-	-

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

Note 3

All other times are unchanged

Curves are drawn for Star connections under no-load excitation at rated speeds. For other connection (where applicable) the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2


Series Delta = Curve current value X 1.732

STAMFORD®

S9H1D-A4 Wdg.61

Typical Alternator Operating Charts

6600V/50Hz

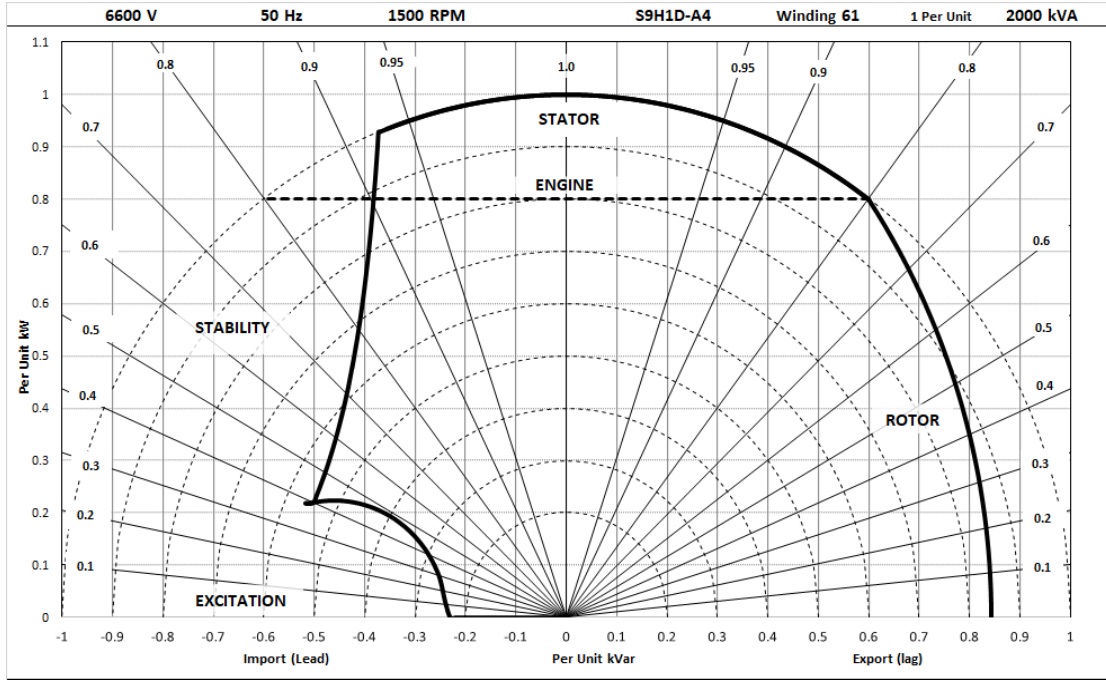

STAMFORD®

S9H1D-A4 Wdg.61

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
50 Hz	Star (V)	6300	6600	6900	N/A	6300	6600	6900	N/A	6300	6600	6900	N/A	6300	6600	6900	N/A
	Parallel Star (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	kVA	2100	2200	2200	N/A	2043	2140	2140	N/A	1909	2000	2000	N/A	1756	1840	1840	N/A
	kW	1680	1760	1760	N/A	1634	1712	1712	N/A	1527	1600	1600	N/A	1405	1472	1472	N/A
	Efficiency (%)	95.1	95.1	95.2	N/A	95.2	95.2	95.3	N/A	95.4	95.4	95.5	N/A	95.6	95.6	95.7	N/A
	kW Input	1767	1851	1848	N/A	1718	1799	1796	N/A	1601	1677	1675	N/A	1469	1539	1538	N/A

60 Hz	Star (V)	N/A				N/A				N/A				N/A			
	Parallel Star (V)	N/A				N/A				N/A				N/A			
	Delta (V)	N/A				N/A				N/A				N/A			
	kVA	N/A				N/A				N/A				N/A			
	kW	N/A				N/A				N/A				N/A			
	Efficiency (%)	N/A				N/A				N/A				N/A			
	kW Input	N/A				N/A				N/A				N/A			

De-rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C @ Class H temperature rise (please refer to applications for ambient temperature de-rates at other temperature rise classes)
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters (for <690V) or 1500 meters (for >690V) must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

stamford-avk.com

**For Applications Support:
applications@cummins.com**

**For Customer Service:
emea.service@cummins.com**

**For General Enquiries:
Stamford-avk@cummins.com**

Copyright 2020. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

